




Zebra® TTP 8000 Series™ Kiosk Printers



SEE MORE. DO MORE.

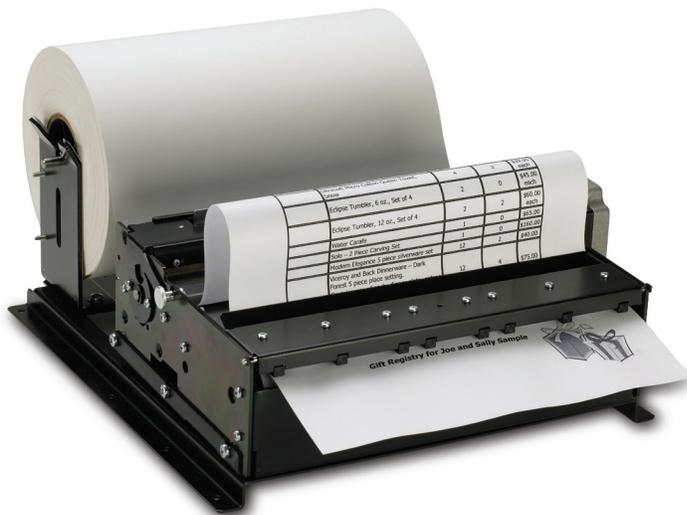

The TTP 8000 series kiosk printers offer 203 dpi resolution for full-format A4 or letter-size printouts of forms, bank statements, maps or Web pages. The fast, compact and low-maintenance design makes these printers ideal for unattended environments. The pull detector and jam-preventing loop presenter provide trouble-free operation. The retract function keeps sensitive documents from being left behind outside the kiosk—and it saves media. If a printout is not taken from the printer, the output will

be retracted, and the remaining information can be deleted from the queue, eliminating unwanted print jobs. The TTP 8200™ is available in three configurations for flexible kiosk integration: standard, compact and vertical, each equipped with standard USB and parallel interfaces. For additional configuration flexibility, the media can be mounted either behind or below the printer. For applications requiring crisp images, Zebra offers the TTP 8300™ kiosk printer with 300 dpi resolution.

TTP 8000 Series Kiosk Printers Offer:

Unremitting Reliability to Keep Kiosks Printing

Optimized for tough printing environments where durability, reliability, minimal maintenance and ease of use are critical, Zebra printers maximize uptime and minimize upkeep.

Easy to Integrate in Kiosk Designs

A small footprint and flexible mounting options make our printers ideal for a variety of applications.

End Benefits

As an integral part of a self-service kiosk solution, Zebra printers help companies improve service, raise customer satisfaction, increase revenue and lower operational costs.

SPECIFICATIONS AT A GLANCE*

Printer Name

- TTP 8200 203 dpi (Horizontal, Vertical or Compact)
- TTP 8300 300 dpi (Horizontal)

Standard Features

- Direct thermal printing for A4 or letter-size media and documents
- Looping presenter with pull detector and retract & retain function (compact version does not have looping presenter, pull detector or retract function)
- Auto media loading
- Various media mounting options behind and below give flexibility to kiosk design, up to 9.84"/250 mm diameter media rolls
- USB and parallel connectivity
- 203 or 300 dpi printing
- Windows® drivers for plug and play
- Prints any font, code page, barcode and graphics supported by the operating system

Printer Specifications

Resolution

203 dpi/8 dots per mm

Maximum Print Width

8.5"/216 mm or A4 (8.27"/210 mm)

Maximum Print Length

No limit

Print Speed

4"/100 mm per second

Media Sensors

Out-of-paper, paper in presenter, paper in retract path, black mark, and paper-low reporting

Media Characteristics

Paper Width

8.5"/216 mm or A4 (8.27"/210 mm)

Maximum Roll Size

9.84"/250 mm

Media Thickness

0.002"/0.054 mm to 0.004"/0.1 mm

Media Types

Roll or fanfold paper

Operating Characteristics

Environmental

- Operating Temp.: 32° F/0° C to 122° F/50° C
- Storage Temp.: 14° F/-10° C to 122° F/50° C
- Operating Humidity: 35% to 75% non-condensing
- Storage Humidity: 10% to 90% non-condensing excluding paper

Electrical

24Vdc +/-10% average 6A, peak 12A

Physical Characteristics

Standard and Vertical

- Width: 11.3"/286 mm
- Height: 3.1"/78 mm
- Depth: 6.7"/171 mm
- Weight: 10.6 lbs/4.8 kg

Compact

- Width: 11.1"/282 mm
- Height: 3.3"/84 mm
- Depth: 4.1"/103 mm
- Weight: 6.2 lbs/2.8 kg

Fonts/Graphics/Symbologies

Barcodes

Code 39 internally, other symbologies can be printed via Windows drivers

Graphics

Logotypes and b&w BMP-files

Standard Fonts

ATM9 (Monospaced 14.4 cpi), up to 8 fonts can be uploaded

Text Attributes

Underline, bold, italics, reverse print, multiple width and height

Communication and Interface Capabilities

Parallel IEEE-1284 and USB

Operating System

Windows 2000, XP and Server 2003

Options and Accessories

- 8.5"/216 mm Roll Holder Behind with paper-low sensor, 5.9"/150 mm diameter max
- 8.5"/216 mm Roll Holder Below with paper-low and weekend sensors, 9.8"/250 mm diameter max
- Paper-low and weekend sensors with 15.7"/400 mm cable



Corporate Headquarters
+1 800 423 0442
inquiry4@zebra.com

Asia-Pacific Headquarters
+65 6858 0722
apacchannelmarketing@zebra.com

EMEA Headquarters
+44 (0)1628 556000
mseurope@zebra.com

Latin America Headquarters
+1 847 955 2283
inquiry4@zebra.com

Other Locations / USA: California, Georgia, Illinois, Rhode Island, Texas, Wisconsin **Europe:** France, Germany, Italy, the Netherlands, Poland, Spain, Sweden, Turkey, United Kingdom **Asia Pacific:** Australia, China, Hong Kong, India, Indonesia, Japan, Malaysia, Philippines, Singapore, South Korea, Taiwan, Thailand, Vietnam **Latin America:** Argentina, Brazil, Colombia, Florida (LA Headquarters in USA), Mexico **Africa/Middle East:** Dubai, South Africa

*Specifications subject to change without notice.

©2013 ZIH Corp. All product names and numbers are Zebra trademarks, and Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. All rights reserved. Windows and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners.

P1021845 (04/13)